

**Silicon PNP Power Transistor**

**DESCRIPTION**

- Collector-Emitter Sustaining Voltage-  
:  $V_{CEO(SUS)} = -80(V)(Min.)$
- Low Collector Saturation Voltage  
:  $V_{CE(sat)} = -0.3(V)(Max.) @ I_C = -5A$
- Large Current Capability- $I_C = -10A$

**APPLICATIONS**



- Designed for use as a driver in DC/DC converters and actuators.

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ C$ )**


SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	-80	V
$V_{CEO}$	Collector-Emitter Voltage	-80	V
$V_{EBO}$	Emitter-Base Voltage	-7	V
$I_C$	Collector Current-Continuous	-10	A
$I_{CM}$	Collector Current-Peak	-20	A
$I_B$	Base Current-Continuous	-1.5	A
$I_{BM}$	Base Current-Peak	-2	A
$P_C$	Total Power Dissipation @ $T_C=25^\circ C$	25	W
$T_J$	Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ C$

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th-j-c}$	Thermal Resistance, Junction to Case	5	$^\circ C/W$

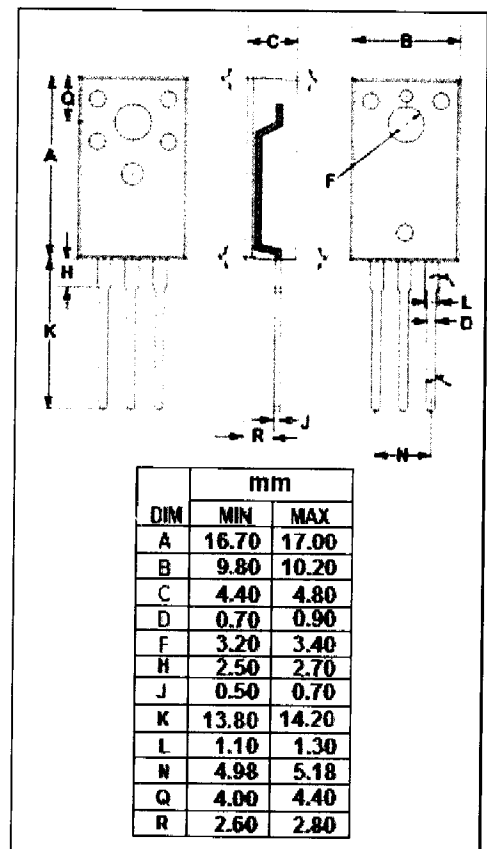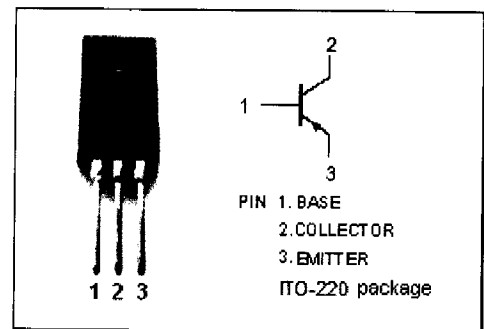

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



## Silicon PNP Power Transistor

## 2SA1880

### ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C = -0.1\text{A}; I_B = 0$	-80			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -5\text{A}; I_B = -0.5\text{A}$			-0.3	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = -5\text{A}; I_B = -0.5\text{A}$			-1.2	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB} = -80\text{V}; I_E = 0$			-100	$\mu\text{A}$
$I_{CEO}$	Collector Cutoff Current	$V_{CE} = -80\text{V}; I_B = 0$			-100	$\mu\text{A}$
$I_{EBO}$	Emitter Cutoff Current	$V_{EB} = -7\text{V}; I_C = 0$			-100	$\mu\text{A}$
$h_{FE}$	DC Current Gain	$I_C = -5\text{A}; V_{CE} = -2\text{V}$	70			
$f_T$	Current-Gain—Bandwidth Product	$I_C = -1\text{A}; V_{CE} = -10\text{V}$		50		MHz

### Switching Times

$t_{on}$	Turn-on Time	$I_C = -5\text{A}, I_{B1} = -I_{B2} = -0.5\text{A}, R_L = 5\ \Omega, V_{BB2} = -4\text{V};$			0.3	$\mu\text{s}$
$t_{stg}$	Storage Time				1.5	$\mu\text{s}$
$t_f$	Fall Time				0.2	$\mu\text{s}$