

**Silicon NPN Power Transistor**


**2SC2791**

**DESCRIPTION**

- High Collector-Emitter Breakdown Voltage-  
:  $V_{(BR)CEO} = 800V(\text{Min.})$
- High Switching Speed



**APPLICATIONS**

- High speed and high voltage switching applications
- Switching regulator applications
- High speed DC-DC converter applications

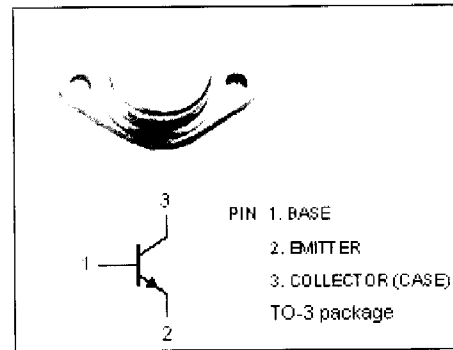

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	900	V
$V_{CEO}$	Collector-Emitter Voltage	800	V
$V_{EBO}$	Emitter-Base Voltage	7	V
$I_C$	Collector Current-Continuous	5	A
$I_B$	Base Current-Continuous	3	A
$P_C$	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	100	W
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ\text{C}$

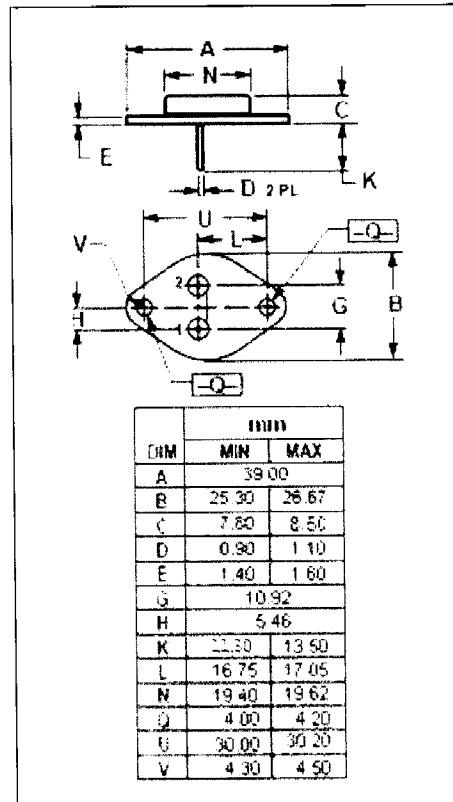

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

# Silicon NPN Power Transistor

# 2SC2791

## ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=10\text{mA}; I_B=0$	800			V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C=1\text{mA}; I_E=0$	900			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=3\text{A}; I_B=0.6\text{A}$			1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=3\text{A}; I_B=0.6\text{A}$			1.5	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}=800\text{V}; I_E=0$			0.1	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=7\text{V}; I_C=0$			1.0	mA
$h_{FE-1}$	DC Current Gain	$I_C=10\text{mA}; V_{CE}=5\text{V}$	10			
$h_{FE-2}$	DC Current Gain	$I_C=3\text{A}; V_{CE}=5\text{V}$	10			

### Switching times

$t_r$	Rise Time	$I_C=3\text{A}; I_{B1}=0.3\text{A}; I_{B2}=-0.8\text{A}$ $R_L=150\Omega; V_{CC}=400\text{V}$ $P_W=20\mu\text{s}; \text{Duty}\leq 1\%$			1.0	$\mu\text{s}$
$t_{stg}$	Storage Time				3.5	$\mu\text{s}$
$t_f$	Fall Time				1.0	$\mu\text{s}$