

# New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.  
SPRINGFIELD, NEW JERSEY 07081  
U.S.A.


## BC146

TELEPHONE: (973) 376-2922  
(212) 227-6005  
FAX: (973) 376-8960

### MINIATURE NPN AF LOW NOISE SILICON PLANAR EPITAXIAL TRANSISTOR

#### GENERAL DESCRIPTION

The BC 146 is a NPN silicon planar epitaxial transistor in miniature plastic package designed for hearing aids, watches, paging systems and other equipment where small size is of paramount importance. The BC 146 is complementary to PNP BC 200.

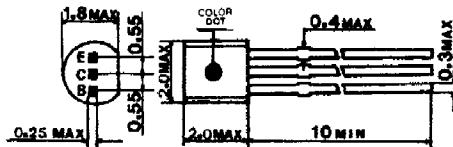

ALL DIMENSIONS IN mm

#### ABSOLUTE MAXIMUM RATINGS

Collector-Base Voltage	$V_{CBO}$	20V
Collector-Emitter Voltage	$V_{CEO}$	20V
Emitter-Base Voltage	$V_{EBO}$	4V
Collector Current	$I_C$	50mA
Total Power Dissipation at $T_A \leq 45^\circ\text{C}$	$P_{tot}$	50mW
Junction Temperature	$T_j$	$125^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	$-65^\circ\text{C}$ to $+125^\circ\text{C}$

#### THERMAL RESISTANCE

Junction to Ambient	$\theta_{ja}$	$1.6^\circ\text{C}/\text{mW}$
---------------------	---------------	-------------------------------

#### ELECTRICAL CHARACTERISTICS AT $T_A = 25^\circ\text{C}$

PARAMETER	SYMBOL	BC 146R			BC 146Y			BC 146G			UNIT	TEST CONDITIONS	
		MIN	Typ	MAX	MIN	Typ	MAX	MIN	Typ	MAX			
Collector-Base Cutoff Current	$I_{CBO}$		100			100		100		nA	$V_{CB}=20\text{V}$	$I_E=0$	
Collector-Emitter Knee Voltage	$V_{CEK}$		200			200		200		mV	$I_C=2\text{mA}$	$I_B=\text{value}$ for which $I_C=2.2\text{mA}$ and $V_{CE}=1\text{V}$	
Base-Emitter Voltage	$V_{BE}$	570			570			570		mV	$V_{CE}=0.5\text{V}$	$I_C=0.2\text{mA}$	
Base-Emitter Voltage	$V_{BE}$	630			630			630		mV	$V_{CE}=1\text{V}$	$I_C=2\text{mA}$	
DC Current Gain	$H_F$	80	120	200	140	220	350	280	380	550		$V_{CE}=0.5\text{V}$	$I_C=0.2\text{mA}$
DC Current Gain	$H_F$	100			140			280				$V_{CE}=1\text{V}$	$I_C=2\text{mA}$
Noise Figure	NF	1.5			1.5	4		1.5			dB	$V_{CE}=5\text{V}$	$I_C=0.2\text{mA}$
Transition Frequency	$f_T$	80			110			150			MHz	$R_g=2\text{K}\Omega$ $f=30\text{Hz}-15\text{KHz}$	
Collector Capacitance	$C_{cb}$	2.5			2.5			2.5			pF	$V_{CB}=5\text{V}$ $f=1\text{MHz}$	$I_E=0$

#### TYPICAL h-PARAMETERS AT $V_{CE}=0.5\text{V}$ , $I_C=0.2\text{mA}$ , $f=1\text{KHz}$

PARAMETER	SYMBOL	BC 146R	BC 146Y	BC146G	UNIT
Input Impedance	$h_{ie}$	20	30	45	$\text{K}\Omega$
Reverse Voltage Transfer Ratio	$h_{re}$	15	25	40	$\times 10^{-4}$
Small Signal Current Gain	$h_{fe}$	130	240	400	
Output Admittance	$h_{oe}$	15	20	35	$\mu\text{v}$

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

