

Silicon PNP Power Transistor

BD314

DESCRIPTION

- Excellent Safe Operating Area
- DC Current Gain- $h_{FE} = 25(\text{Min.}) @ I_C = -4A$
- Collector-Emitter Saturation Voltage-
: $V_{CE(sat)} = -1.0 \text{ V}(\text{Max}) @ I_C = -5A$
- Complement to Type BD313

APPLICATIONS



- Designed for high quality amplifiers operating up to 60 watts into 4 ohm load.

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ\text{C}$)


SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-80	V
V_{CEO}	Collector-Emitter Voltage	-80	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-10	A
I_{CM}	Collector Current-Peak	-20	A
I_B	Base Current-Continuous	-4	A
P_C	Collector Power Dissipation@ $T_C = 25^\circ\text{C}$	115	W
T_J	Junction Temperature	200	$^\circ\text{C}$
T_{stg}	Storage Temperature	-65~200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R_{th-j-c}	Thermal Resistance, Junction to Case	1.52	$^\circ\text{C/W}$

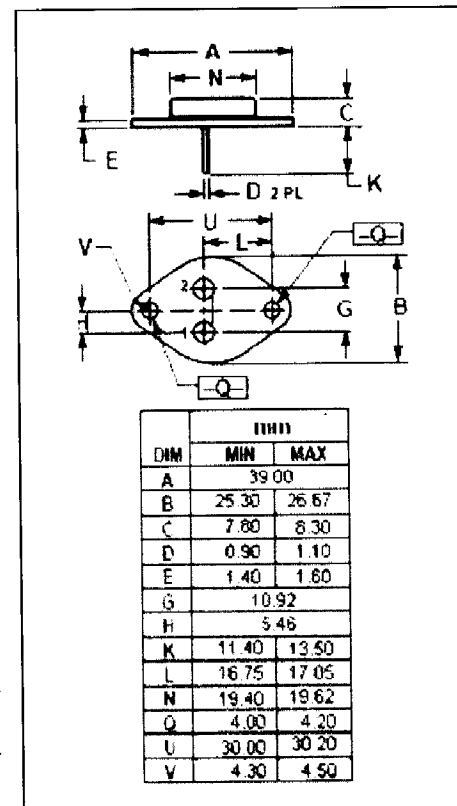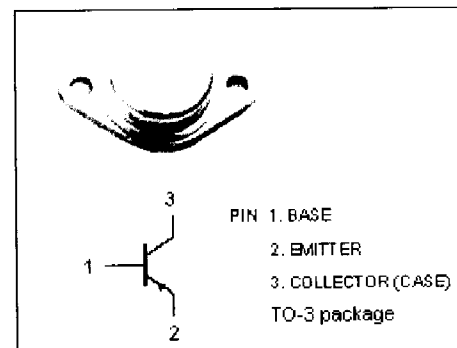

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



Silicon PNP Power Transistor

BD314

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CE(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C = -200\text{mA}; I_B = 0$	-80		V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -5\text{A}; I_B = -0.5\text{A}$		-1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = -5\text{A}; I_B = -0.5\text{A}$		-1.8	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C = -4\text{A}; V_{CE} = -4\text{V}$		-1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = -80\text{V}; I_B = 0$		-1.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -7.0\text{V}; I_C = 0$		-1.0	mA
h_{FE-1}	DC Current Gain	$I_C = -4\text{A}; V_{CE} = -4\text{V}$	25		
h_{FE-2}	DC Current Gain	$I_C = -10\text{A}; V_{CE} = -4\text{V}$	5		
f_T	Current Gain-Bandwidth Product	$I_C = -0.5\text{A}; V_{CE} = -10\text{V}; f = 1.0\text{MHz}$	4		MHz