

Silicon PNP Power Transistor

BD536

DESCRIPTION

- DC Current Gain -
 : $h_{FE} = 40 @ I_C = -0.5A$
- Collector-Emitter Sustaining Voltage-
 : $V_{CEO(SUS)} = -60V(\text{Min})$
- Complement to Type BD535

APPLICATIONS



- Designed for use in medium power linear and switching applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-60	V
V_{CES}	Collector-Emitter Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-60	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-8	A
I_E	Emitter Current- Continuous	-8	A
I_B	Base Current	-1	A
P_C	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	50	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65-150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	2.5	$^\circ\text{C/W}$
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	70	$^\circ\text{C/W}$

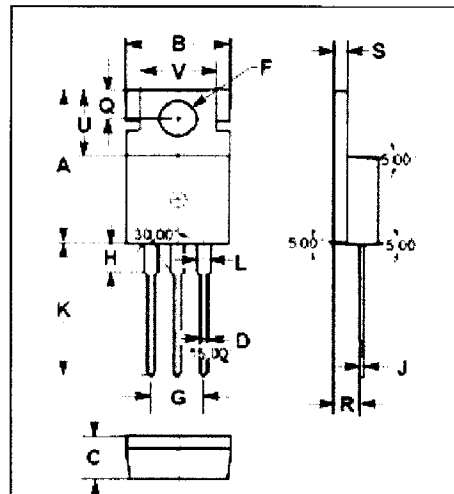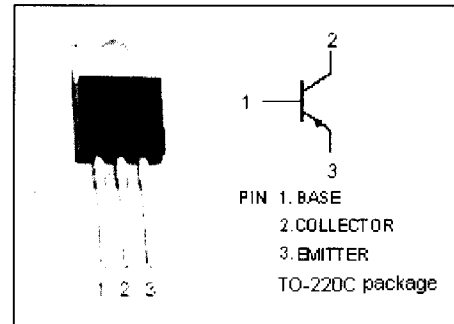

DIM	mm	
	MIN	MAX
A	15.70	15.90
B	9.90	10.10
C	4.20	4.40
D	0.70	0.90
F	3.40	3.60
G	4.98	5.18
H	2.70	2.90
J	0.44	0.46
K	13.20	13.40
L	1.10	1.30
Q	2.70	2.90
R	2.50	2.70
S	1.29	1.31
U	6.45	6.65
V	8.66	8.86

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



Silicon PNP Power Transistor

BD536

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CE(sus)}$	Collector-Emitter Sustaining Voltage	$I_C = -100\text{mA}; I_B = 0$	-60		V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C = -2\text{A}; I_B = -0.2\text{A}$		-0.8	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C = -6\text{A}; I_B = -0.6\text{A}$	-0.8		V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C = -2\text{A}; V_{CE} = -2\text{V}$		-1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = -60\text{V}; I_E = 0$		-0.1	mA
I_{CES}	Collector Cutoff Current	$V_{CE} = -60\text{V}; V_{BE} = 0$		-0.1	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -5\text{V}; I_C = 0$		-1.0	mA
h_{FE-1}	DC Current Gain	$I_C = -10\text{mA}; V_{CE} = -5\text{V}$	20		
h_{FE-2}	DC Current Gain	$I_C = -0.5\text{A}; V_{CE} = -2\text{V}$	40		
h_{FE-3}	DC Current Gain	$I_C = -2\text{A}; V_{CE} = -2\text{V}$	25		
f_T	Current-Gain—Bandwidth Product	$I_C = -0.5\text{A}; V_{CE} = -1\text{V}$	3.0		MHz