


2,000 V - 10,000 V Rectifiers
0.10 A - 0.5 A Forward Current
70 ns Recovery Time

1N6521 1N6523
1N6525 1N6527

AXIAL LEADED
HERMETICALLY SEALED

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS														
Part Number	Working Reverse Voltage (V _{rw})	Average Rectified Current (I _o)		Reverse Current @ V _{rw} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current t _p =8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (3) (T _{rr})	Thermal Impedance θ _{J-L}			Junction Cap. @50VDC @ 1kHz (C _j)
		55°C(1)	100°C(2)	25°C	100°C	25°C		25°C	25°C	25°C	L=000	L= 125	L=.250	25°C
	Volts	Amps	Amps	μA	μA	Volts	Amps	Amps	Amps	ns	°C/W	°C/W	°C/W	pF
1N6521	2000	0.500	0.250	0.5	20	3.0	0.50	25	5	70	5	12	21.5	8
1N6523	3000	0.250	0.125	0.5	20	5.0	0.25	15	3	70	5	12	21.5	4
1N6525	5000	0.150	0.075	0.5	20	7.0	0.15	10	2	70	5	12	21.5	3
1N6527	10000	0.100	0.050	0.5	20	12.0	0.10	5	1	70	5	12	21.5	2

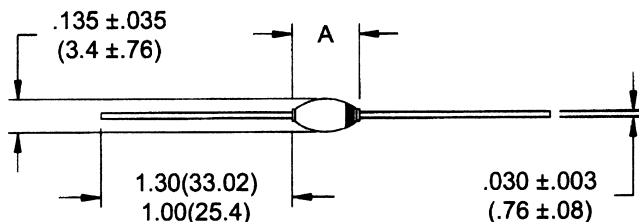

Part	A
1N6521	.220(5.59) MAX. .160(4.06) MIN.
1N6523	.240(6.10) MAX. .180(4.57) MIN.
1N6525	.260(6.60) MAX. .200(5.08) MIN.
1N6527	.320(8.13) MAX. .260(6.60) MIN.

