

Silicon PNP Power Transistor

2SB1468

DESCRIPTION




- Collector-Emitter Breakdown Voltage-
 : $V_{(BR)CEO} = -30V(\text{Min})$
- Low Collector Saturation Voltage-
 : $V_{CE(sat)} = -0.5V(\text{Max}) @ (I_C = -5A, I_B = -0.25A)$
- Complement to Type 2SD2219

APPLICATIONS

- Designed for high-speed inverters, converters.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-30	V
V_{EBO}	Emitter-Base Voltage	-6	V
I_C	Collector Current-Continuous	-12	A
I_{CM}	Collector Current-Pulse	-20	A
P_C	Collector Power Dissipation @ $T_a=25^\circ\text{C}$	2	W
	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	25	
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55~150	$^\circ\text{C}$

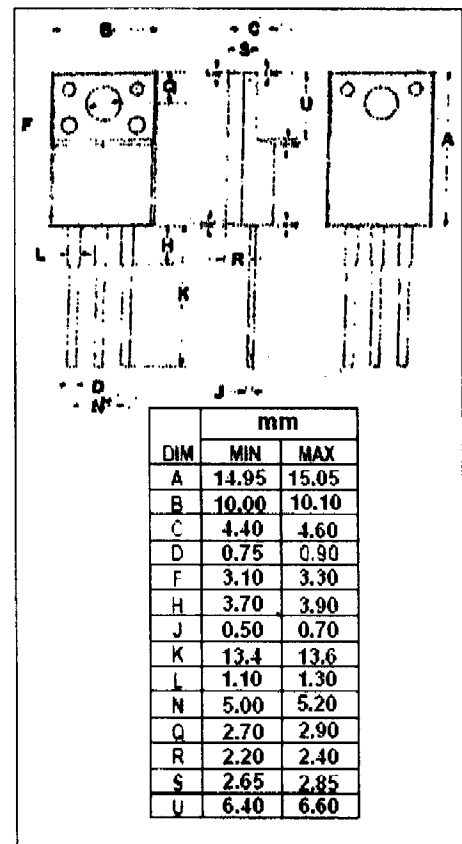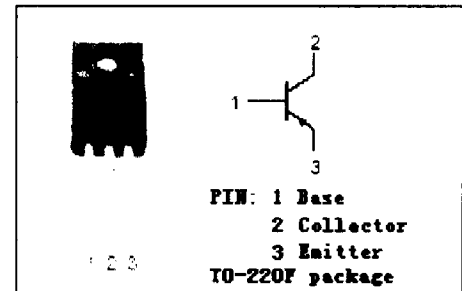

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

Silicon PNP Power Transistor

2SB1468

ELECTRICAL CHARACTERISTICS

T_J=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = -1mA; R _{BE} = ∞	-30			V
V _{(BR)CBO}	Collector-Base Breakdown Voltage	I _C = -1mA; I _E = 0	-60			V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage	I _E = -1mA; I _C = 0	-6			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = -5A; I _B = -0.25A			-0.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} = -40V; I _E = 0			-100	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = -4V; I _C = 0			-100	μ A
h _{FE-1}	DC Current Gain	I _C = -1A; V _{CE} = -2V	70		280	
h _{FE-2}	DC Current Gain	I _C = -6A; V _{CE} = -2V	30			

Switching Times

t _{on}	Turn-on Time	V _{CC} = -10V, R _L = 2Ω, I _C = -5A, I _{B1} = -I _{B2} = -0.5A,		0.1		μ s
t _{stg}	Storage Time			0.3		μ s
t _r	Fall Time			0.03		μ s

◆ h_{FE-1} Classifications

Q	R	S
70-140	100-200	140-280