

Silicon NPN Power Transistor

2SC4512

DESCRIPTION



- Low Collector Saturation Voltage
 $V_{CE(sat)} = 0.5(V)(Max) @ I_C = 2A$
- High Switching Speed
- Complement to Type 2SA1726

APPLICATIONS


- Designed for audio and general purpose applications.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	120	V
V_{CEO}	Collector-Emitter Voltage	80	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	6	A
I_B	Base Current-Continuous	3	A
P_C	Total Power Dissipation @ $T_c = 25^\circ C$	50	W
T_J	Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

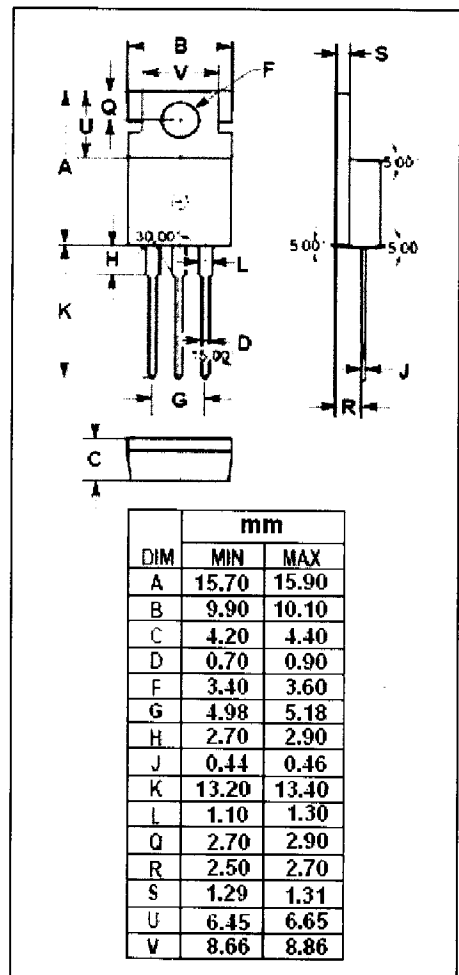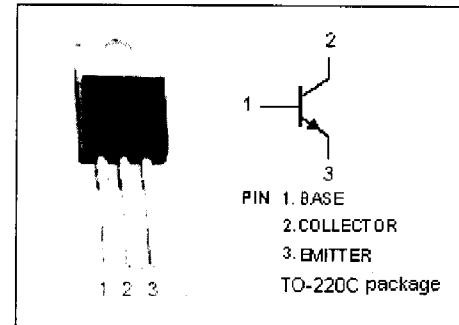

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



Silicon NPN Power Transistor

2SC4512

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=25\text{mA}; I_B=0$	80			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=2\text{A}; I_B=0.2\text{A}$			0.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=120\text{V}; I_E=0$			10	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=6\text{V}; I_C=0$			10	μA
h_{FE}	DC Current Gain	$I_C=2\text{A}; V_{CE}=4\text{V}$	50		180	
f_T	Current-Gain—Bandwidth Product	$I_E=0.5\text{A}; V_{CE}=12\text{V}$		20		MHz
C_{OB}	Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f_{test}=1\text{MHz}$		110		pF

Switching Times

t_{on}	Turn-on Time	$I_C=3\text{A}, R_L=10\Omega,$ $I_{B1}=-I_{B2}=0.3\text{A}, V_{CC}=30\text{V}$		0.16		μs
t_{stg}	Storage Time			2.60		μs
t_f	Fall Time			0.34		μs

◆ h_{FE} Classifications

O	P	Y
50-100	70-140	90-180