New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

Silicon NPN Power Transistor

BD249/A/B/C

DESCRIPTION

- Collector Current $-I_C$= 25A
- Collector-Emitter Breakdown Voltage-
  : $V_{(BR)CEO}$ = 45V(Min)- BD249; 60V(Min)- BD249A
  80V(Min)- BD249B; 100V(Min)- BD249C
- Complement to Type BD250/A/B/C

APPLICATIONS

- Designed for use in general purpose power amplifier and switching applications

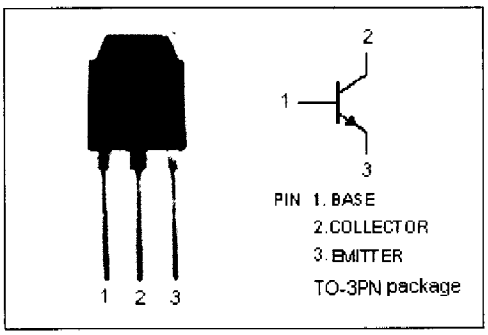

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER		VALUE	UNIT
V_{CER}	Collector-Emitter Voltage (R_{BE}= 100Ω)	BD249	55	V
		BD249A	70	
		BD249B	90	
		BD249C	115	
V_{CEO}	Collector-Emitter Voltage	BD249	45	V
		BD249A	60	
		BD249B	80	
		BD249C	100	
V_{EBO}	Emitter-Base Voltage		5	V
I_C	Collector Current-Continuous		25	A
I_{CM}	Collector Current-Peak		40	A
I_B	Base Current		5	A
P_C	Collector Power Dissipation @ T_a=25℃		3	W
	Collector Power Dissipation @ T_C=25℃		125	
T_J	Junction Temperature		150	℃
T_{stg}	Storage Temperature Range		-65~150	℃

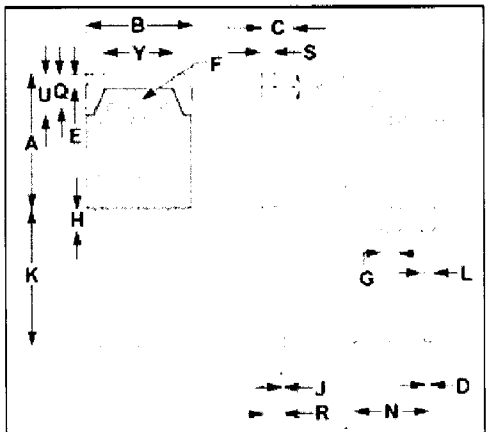

DIM	mm MIN	mm MAX
A	19.90	20.10
B	15.50	15.70
C	4.70	4.90
D	0.90	1.10
E	1.90	2.10
F	3.40	3.60
G	2.90	3.10
H	3.20	3.40
J	0.595	0.605
K	20.50	20.70
L	1.90	2.10
N	10.89	10.91
Q	4.90	5.10
R	3.35	3.45
S	1.995	2.005
U	5.90	6.10
Y	9.90	10.10

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j\text{-}c}$	Thermal Resistance, Junction to Case	1.0	℃/W

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	BD249	I_C= 30mA ; I_B=0	45			V
		BD249A		60			
		BD249B		80			
		BD249C		100			
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage		I_C= 15A; I_B= 1.5A			1.8	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage		I_C= 25A; I_B= 5A			4.0	V
$V_{BE(on)-1}$	Base-Emitter On Voltage		I_C= 15A; V_{CE}= 4V			2.0	V
$V_{BE(on)-2}$	Base-Emitter On Voltage		I_C= 25A; V_{CE}= 4V			4.0	V
I_{CES}	Collector Cutoff Current	BD249	V_{CE}= 55V; V_{BE}= 0			0.7	mA
		BD249A	V_{CE}= 70V; V_{BE}= 0				
		BD249B	V_{CE}= 90V; V_{BE}= 0				
		BD249C	V_{CE}= 115V; V_{BE}= 0				
I_{CEO}	Collector Cutoff Current	BD249/A	V_{CE}= 30V;I_B= 0			1.0	mA
		BD249B/C	V_{CE}= 60V;I_B= 0				
I_{EBO}	Emitter Cutoff Current		V_{EB}= 5V; I_C= 0			1.0	mA
h_{FE-1}	DC Current Gain		I_C= 1.5A; V_{CE}= 4V	25			
h_{FE-2}	DC Current Gain		I_C= 15A; V_{CE}= 4V	10			
h_{FE-3}	DC Current Gain		I_C= 25A; V_{CE}= 4V	5			

Switching times

t_{on}	Turn-on Time	I_C= 5A; I_{B1}= -I_{B2}= 0.5A; R_L= 5 Ω ; $V_{BE(off)}$= -5V		0.3		μ s
t_{off}	Turn-off Time			0.9		μ s