

**Silicon NPN Power Transistor**


**BD719**

**DESCRIPTION**

- DC Current Gain-  
 :  $h_{FE} = 40 @ I_C = 0.5A$
- Collector-Emitter Breakdown Voltage -  
 :  $V_{(BR)CEO} = 60V(\text{Min})$
- Complement to type BD720


**APPLICATIONS**

- Designed for use in audio output and general purpose amplifier applications.

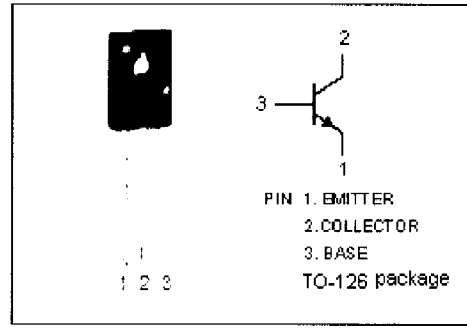

**ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ C$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	60	V
$V_{CEO}$	Collector-Emitter Voltage	60	V
$V_{EBO}$	Emitter-Base Voltage	5	V
$I_C$	Collector Current-Continuous	4	A
$I_{CM}$	Collector Current-Peak	7	A
$I_B$	Base Current-Continuous	1	A
$P_C$	Collector Power Dissipation @ $T_C = 25^\circ C$	30	W
$T_J$	Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-65~150	$^\circ C$

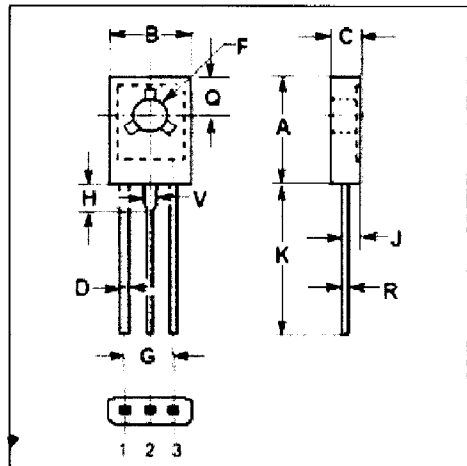

DIM	mm	
	MIN	MAX
A	10.70	10.90
B	7.70	7.90
C	2.60	2.80
D	0.66	0.86
F	3.10	3.30
G	4.48	4.68
H	2.00	2.20
J	1.35	1.55
K	16.10	16.30
Q	3.70	3.90
R	0.40	0.60
V	1.17	1.37

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	3.5	$^\circ C/W$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	100	$^\circ C/W$

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



# Silicon NPN Power Transistor

# BD719

## ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=30\text{mA}; I_B=0$	60			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=2\text{A}; I_B=0.2\text{A}$			1.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C=2\text{A}; V_{CE}=4\text{V}$			1.4	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}=60\text{V}; I_E=0$			50	$\mu\text{A}$
		$V_{CB}=30\text{V}; I_E=0; T_C=150^\circ\text{C}$			1	mA
$I_{CEO}$	Collector Cutoff Current	$V_{CE}=30\text{V}; I_B=0$			0.1	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=5\text{V}; I_C=0$			0.2	mA
$h_{FE-1}$	DC Current Gain	$I_C=0.5\text{A}; V_{CE}=4\text{V}$	40			
$h_{FE-2}$	DC Current Gain	$I_C=2\text{A}; V_{CE}=4\text{V}$	20			
$f_T$	Current-Gain—Bandwidth Product	$I_C=0.5\text{A}; V_{CE}=4\text{V}$	3			MHz

### Switching Times

$t_{on}$	Turn-On time	$I_C=1\text{A}; I_{B1}=-I_{B2}=0.1\text{A}; V_{CC}=20\text{V}$		0.3		$\mu\text{s}$
$t_{off}$	Turn-Off time			1.5		$\mu\text{s}$