

Silicon NPN Darlington Power Transistor


BDV67D

DESCRIPTION

- Collector Current $-I_C = 16A$
- Collector-Emitter Saturation Voltage-
 $V_{CE(sat)} = 2.0V(\text{Max.}) @ I_C = 10A$
- Complement to Type BDV66D


APPLICATIONS

- Designed for audio output stages and general amplifier and switching applications

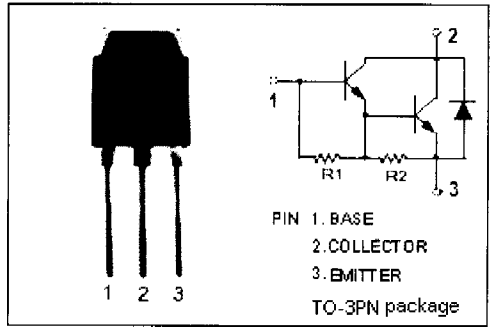

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	160	V
V_{CEO}	Collector-Emitter Voltage	150	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	16	A
I_{CM}	Collector Current-Peak	20	A
I_B	Base Current-Continuous	0.5	A
P_C	Collector Power Dissipation @ $T_C=25^\circ C$	200	W
T_J	Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-65~150	$^\circ C$

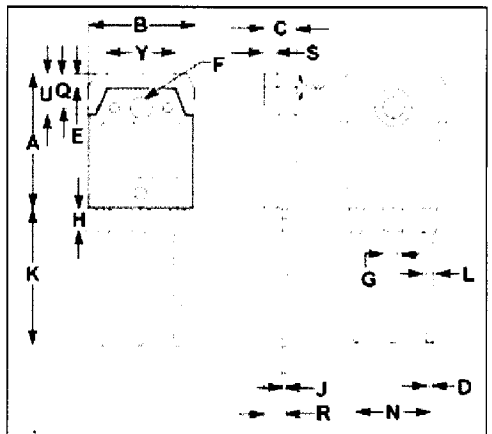

DIM	mm	
	MIN	MAX
A	19.90	20.10
B	15.50	15.70
C	4.70	4.90
D	0.90	1.10
E	1.90	2.10
F	3.40	3.60
G	2.90	3.10
H	3.20	3.40
J	0.595	0.605
K	20.50	20.70
L	1.90	2.10
N	10.89	10.91
Q	4.90	5.10
R	3.35	3.45
S	1.995	2.005
U	5.90	6.10
Y	9.90	10.10

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R_{th-j-c}	Thermal Resistance, Junction to Case	0.625	$^\circ C/W$



NJ Semi-Products reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Products is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Products assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Products encourages customers to verify that datasheets are current before placing orders.

Silicon NPN Darlington Power Transistor

BDV67D

ELECTRICAL CHARACTERISTICS

$T_c=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=100\text{mA}; I_B=0$	150			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=10\text{A}; I_B=40\text{mA}$			2	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C=10\text{A}; V_{CE}=3\text{V}$			2.5	V
I_{CEO}	Collector Cutoff Current	$V_{CE}=\frac{1}{2}V_{CEOmax}; I_B=0$			1	mA
I_{CBO}	Collector Cutoff Current	$V_{CB}=V_{CB0max}; I_E=0$			1	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=5\text{V}; I_C=0$			5	mA
h_{FE}	DC Current Gain	$I_C=3\text{A}; V_{CE}=3\text{V}$	1000			
C_{OB}	Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f_{test}=1\text{MHz}$		300		pF

Switching times

t_{on}	Turn-on Time	$I_C=10\text{A}; I_{B1}=-I_{B2}=40\text{mA}; V_{CC}=12\text{V}$		1		μs
t_{off}	Turn-off Time			3.5		μs