

Silicon NPN Darlington Power Transistor

DESCRIPTION

- Collector Current $I_C = 16A$
- Collector-Emitter Saturation Voltage-
 $V_{CE(sat)} = 2.0V(Max.) @ I_C = 10A$
- Complement to Type BDV66/A/B/C

APPLICATIONS



- Designed for audio output stages and general amplifier and switching applications

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT	
V_{CBO}	Collector-Base Voltage	BDV67	80	V
		BDV67A	100	
		BDV67B	120	
		BDV67C	140	
V_{CEO}	Collector-Emitter Voltage	BDV67	60	V
		BDV67A	80	
		BDV67B	100	
		BDV67C	120	
V_{EBO}	Emitter-Base Voltage	5	V	
I_C	Collector Current-Continuous	16	A	
I_{CM}	Collector Current-Peak	20	A	
I_B	Base Current-Continuous	0.5	A	
P_C	Collector Power Dissipation @ $T_c = 25^\circ C$	175	W	
T_J	Junction Temperature	150	$^\circ C$	
T_{stg}	Storage Temperature Range	-65~150	$^\circ C$	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	0.625	$^\circ C/W$

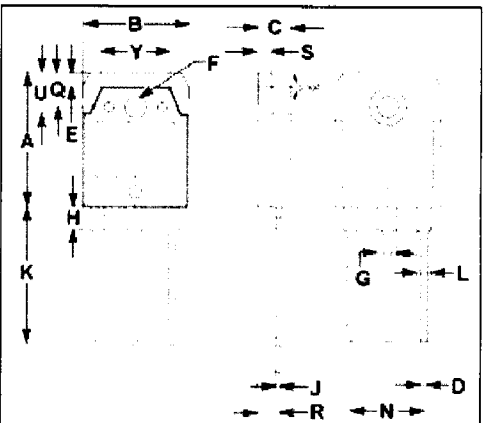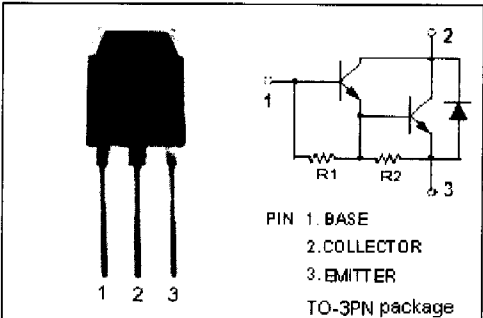

DIM	mm	
	MIN	MAX
A	19.90	20.10
B	15.50	15.70
C	4.70	4.90
D	0.90	1.10
E	1.90	2.10
F	3.40	3.60
G	2.90	3.10
H	3.20	3.40
J	0.595	0.605
K	20.50	20.70
L	1.90	2.10
N	10.89	10.91
Q	4.90	5.10
R	3.35	3.45
S	1.995	2.005
U	5.90	6.10
Y	9.90	10.10

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



Silicon NPN Darlington Power Transistor

BDV67/A/B/C

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT	
$V_{CE(sus)}$	Collector-Emitter Sustaining Voltage	BDV67	60			V	
		BDV67A	80				
		BDV67B	100				
		BDV67C	120				
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=10\text{A}; I_B=40\text{mA}$			2	V	
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C=10\text{A}; V_{CE}=3\text{V}$			2.5	V	
I_{CEO}	Collector Cutoff Current	$V_{CE}=\frac{1}{2}V_{CE0max}; I_B=0$			1	mA	
I_{CBO}	Collector Cutoff Current	BDV67	$V_{CB}=40\text{V}; I_E=0; T_J=150^\circ\text{C}$			5	mA
		BDV67A	$V_{CB}=50\text{V}; I_E=0; T_J=150^\circ\text{C}$				
		BDV67B	$V_{CB}=60\text{V}; I_E=0; T_J=150^\circ\text{C}$				
		BDV67C	$V_{CB}=70\text{V}; I_E=0; T_J=150^\circ\text{C}$				
I_{CBO}	Collector Cutoff Current	$V_{CB}=V_{CBOmax}; I_E=0$			1	mA	
I_{EBO}	Emitter Cutoff Current	$V_{EB}=5\text{V}; I_C=0$			5	mA	
h_{FE}	DC Current Gain	$I_C=10\text{A}; V_{CE}=3\text{V}$	1000				
C_{OB}	Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f_{test}=1\text{MHz}$		300		pF	

Switching times

t_{on}	Turn-on Time	$I_C=10\text{A}; I_{B1}=-I_{B2}=40\text{mA}; V_{CC}=12\text{V}$		1		μs
t_{off}	Turn-off Time			3.5		μs