

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:


The **BLX96** is Designed for Class A Television Band IV- V Amplifier Applications Requiring High Linearity.

FEATURES:

- $P_G = 7.0$ dB Typical at 860 MHz
- $IMD_3 = -63$ dBc Typ. at $P_{REF} = 0.5$ W
- **Omnigold™** Metallization System


MAXIMUM RATINGS

I_C	1.0 A
V_{CB}	45 V
P_{DISS}	16 W @ $T_C = 25^\circ C$
T_J	$-65^\circ C$ to $+200^\circ C$
T_{STG}	$-65^\circ C$ to $+150^\circ C$
θ_{JC}	11 $^\circ C/W$

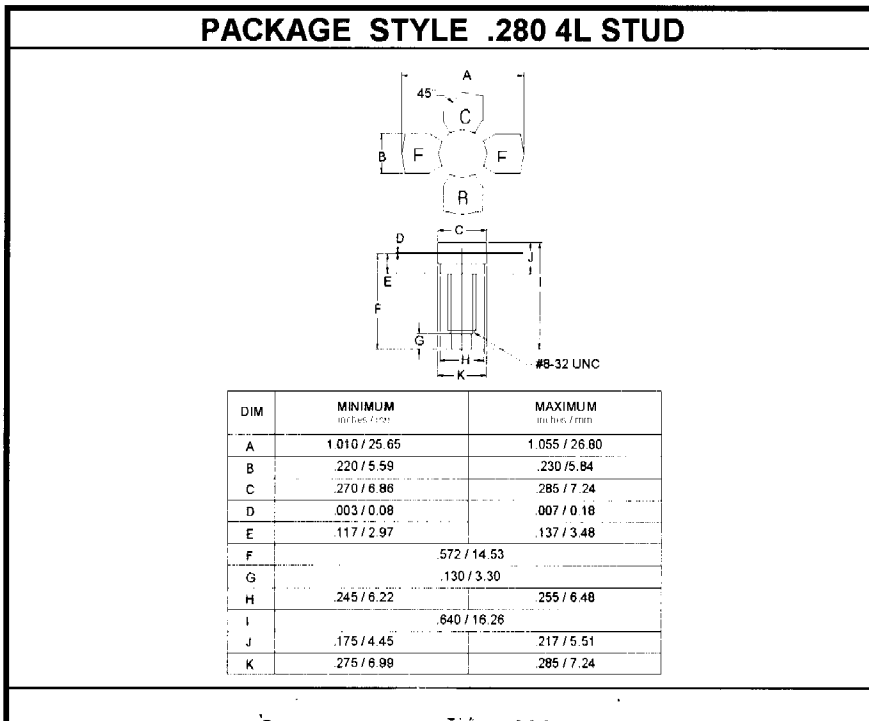

CHARACTERISTICS $T_C = 25^\circ C$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CEO}	$I_C = 40$ mA	24			V
BV_{CER}	$I_C = 40$ mA $R_{BE} = 10 \Omega$	50			V
BV_{CBO}	$I_C = 2$ mA	45			V
BV_{EBO}	$I_E = 0.5$ mA	3.5			V
h_{FE}	$V_{CE} = 20$ V $I_C = 250$ mA	20		150	---
C_{OB}	$V_{CB} = 20$ V $f = 1.0$ MHz			10	pF
P_G	$V_{CE} = 25$ V $I_C = 250$ mA $P_{REF} = 0.5$ W	6.0	7.0		dB
IMD_3	$F = 860$ MHz Vision = -8.0 dB Sound = -7.0 dB Chroma = -16 dB			-60	dBc



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.