

# New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.  
SPRINGFIELD, NEW JERSEY 07081  
U.S.A.

## BR600 - BR610

TELEPHONE: (973) 376-2922  
(212) 227-6005

## SILICON BRIDGE RECTIFIERS

**PRV : 50 - 1000 Volts**  
**I<sub>o</sub> : 6.0 Amperes**

### FEATURES :

- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Ideal for printed circuit board
- \* Rated isolation-voltage 2000 V<sub>AC</sub>
- \* Pb / RoHS Free

### MECHANICAL DATA :


- \* Case : Reliable low cost construction utilizing molded plastic technique
- \* Epoxy : UL94V-0 rate flame retardant
- \* Lead : Axial lead solderable per MIL - STD 202 , Method 208 guaranteed
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Any
- \* Weight : 3.6 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.


For capacitive load, derate current by 20%.

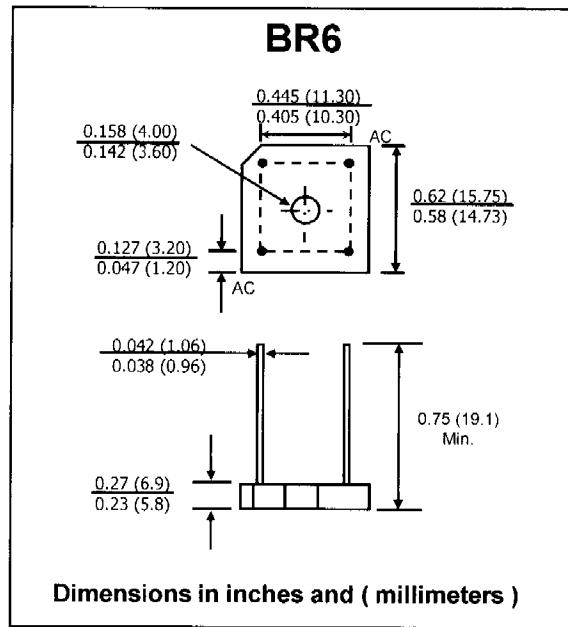

| RATING  | SYMBOL             | BR600 | BR601 | BR602 | BR604         | BR606 | BR608 | BR610 | UNIT             |
|---|--------------------|-------|-------|-------|---------------|-------|-------|-------|------------------|
| Maximum Recurrent Peak Reverse Voltage  | V <sub>RRM</sub>   | 50    | 100   | 200   | 400           | 600   | 800   | 1000  | V                |
| Maximum RMS Voltage   | V <sub>RMS</sub>   | 35    | 70    | 140   | 280           | 420   | 560   | 700   | V                |
| Maximum DC Blocking Voltage   | V <sub>DC</sub>    | 50    | 100   | 200   | 400           | 600   | 800   | 1000  | V                |
| Maximum Average Forward Current T <sub>c</sub> =50°C  | I <sub>F(AV)</sub> |       |       |       |               |       |       |       | A                |
| Peak Forward Surge Current,<br>Single half sine wave Superimposed<br>on rated load (JEDEC Method)         | I <sub>FSM</sub>   |       |       |       |               |       |       |       | A                |
| Current Squared Time at t < 8.3 ms.   | I <sup>2</sup> t   |       |       |       |               |       |       |       | A <sup>2</sup> S |
| Maximum Forward Voltage per Diode at I <sub>F</sub> = 3 A.  | V <sub>F</sub>     |       |       |       |               |       |       |       | V                |
| Maximum DC Reverse Current T <sub>a</sub> = 25 °C<br>at Rated DC Blocking Voltage T <sub>a</sub> = 100 °C | I <sub>R</sub>     |       |       |       |               |       |       |       | µA               |
| Typical Thermal Resistance (Note 1)   | R <sub>θJC</sub>   |       |       |       |               |       |       |       | °C/W             |
| Operating Junction Temperature Range  | T <sub>J</sub>     |       |       |       | - 40 to + 150 |       |       |       | °C               |
| Storage Temperature Range   | T <sub>STG</sub>   |       |       |       | - 40 to + 150 |       |       |       | °C               |

Note : (1) Thermal Resistance from junction to case with units mounted on a 2.6" x 1.4" x 0.06" THK (6.5cm x 3.5cm x 0.15cm.) Al. Plate. Heatsink.

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



## RATING AND CHARACTERISTIC CURVES ( BR600 - BR610 )

FIG.1 - DERATING CURVE FOR OUTPUT  
RECTIFIED CURRENT

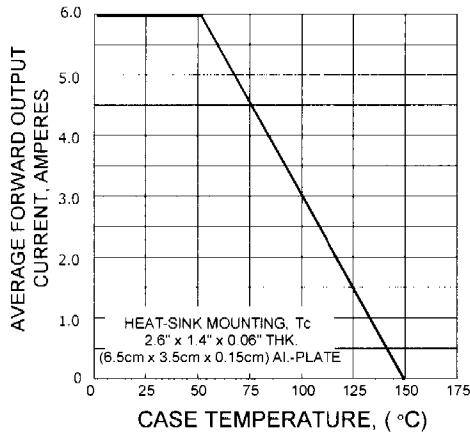


FIG.2 - MAXIMUM NON-REPETITIVE PEAK  
FORWARD SURGE CURRENT

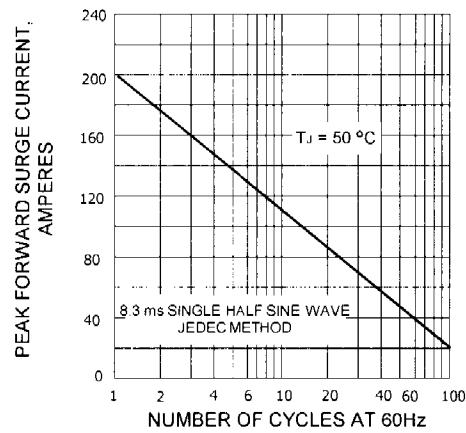


FIG.3 - TYPICAL FORWARD CHARACTERISTICS  
PER DIODE

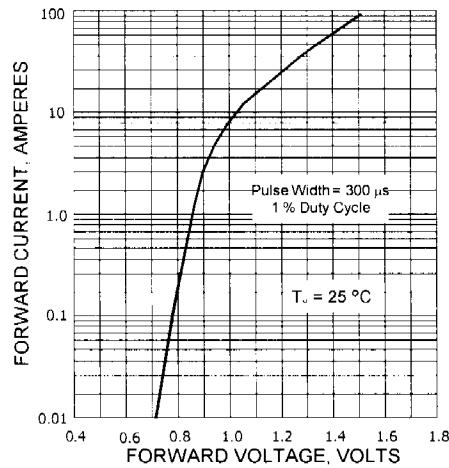


FIG.4 - TYPICAL REVERSE CHARACTERISTICS  
PER DIODE

