

## BUX10

### HIGH POWER NPN SILICON TRANSISTOR


- SGS-THOMSON PREFERRED SALESTYPE
- NPN TRANSISTOR
- HIGH CURRENT CAPABILITY
- FAST SWITCHING SPEED

#### APPLICATIONS


- MOTOR CONTROL
- LINEAR AND SWITCHING INDUSTRIAL EQUIPMENT

#### DESCRIPTION

The BUX10 is a silicon multiepitaxial planar NPN transistor in Jedec TO-3 metal case, intended for use in switching and linear applications in military and industrial equipment.

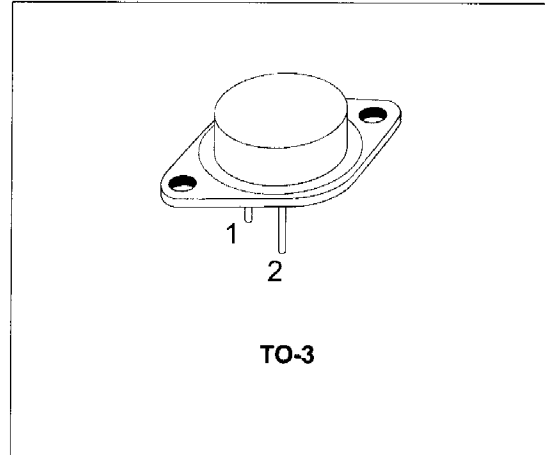


#### INTERNAL SCHEMATIC DIAGRAM



#### ABSOLUTE MAXIMUM RATINGS

| Symbol    | Parameter   | Value      | Unit       |
|-----------|---|------------|------------|
| $V_{CBO}$ | Collector-base Voltage ( $I_E = 0$ )                  | 160        | V          |
| $V_{CEX}$ | Collector-emitter Voltage ( $V_{BE} = -1.5V$ )        | 160        | V          |
| $V_{CEO}$ | Collector-emitter Voltage ( $I_B = 0$ )               | 125        | V          |
| $V_{EBO}$ | Emitter-base Voltage ( $I_C = 0$ )                    | 7          | V          |
| $I_C$     | Collector Current                                     | 25         | A          |
| $I_{CM}$  | Collector Peak Current ( $t_P = 10$ ms)               | 30         | A          |
| $I_B$     | Base Current  | 5          | A          |
| $P_{tot}$ | Total Power Dissipation at $T_{case} \leq 25^\circ C$ | 150        | W          |
| $T_{stg}$ | Storage Temperature                                   | -65 to 200 | $^\circ C$ |
| $T_j$     | Max Operating Junction Temperature                    | 200        | $^\circ C$ |



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

## BUX10

### THERMAL DATA

|                |                                  |     |      |                             |
|----------------|----------------------------------|-----|------|-----------------------------|
| $R_{thj-case}$ | Thermal Resistance Junction-case | Max | 1.17 | $^{\circ}\text{C}/\text{W}$ |
|----------------|----------------------------------|-----|------|-----------------------------|

### ELECTRICAL CHARACTERISTICS ( $T_{case} = 25^{\circ}\text{C}$ unless otherwise specified)

| Symbol          | Parameter                               | Test Conditions  | Min.     | Typ.       | Max.       | Unit          |
|-----------------|---|--|----------|------------|------------|---------------|
| $I_{CEO}$       | Collector Cut-off Current ( $I_B = 0$ ) | $V_{CE} = 100\text{ V}$  |          |            | 1.5        | mA            |
| $I_{CEX}$       | Collector Cut-off Current               | $V_{CE} = 160\text{ V}$<br>$T_{case} = 125^{\circ}\text{C}$<br>$V_{CE} = 160\text{ V}$ |          |            | 1.5        | mA            |
|                 |   | $V_{BE} = -1.5\text{ V}$<br>$V_{BE} = -1.5\text{ V}$                                   |          |            | 6          | mA            |
| $I_{EBO}$       | Emitter Cut-off Current ( $I_C = 0$ )   | $V_{EB} = 5\text{ V}$  |          |            | 1          | mA            |
| $V_{CEO(sus)*}$ | Collector-Emitter Sustaining Voltage    | $I_C = 200\text{ mA}$  | 125      |            |            | V             |
| $V_{EBO}$       | Emitter-Base Voltage ( $I_C = 0$ )      | $I_E = 50\text{ mA}$   | 7        |            |            | V             |
| $V_{CE(sat)*}$  | Collector-Emitter Saturation Voltage    | $I_C = 10\text{ A}$<br>$I_C = 20\text{ A}$   |          | 0.3<br>0.7 | 0.6<br>1.2 | V             |
|                 |   | $I_B = 1\text{ A}$<br>$I_B = 2\text{ A}$   |          |            |            | V             |
| $V_{BE(sat)*}$  | Base-Emitter Saturation Voltage         | $I_C = 20\text{ A}$  |          | 1.6        | 2          | V             |
|                 |   | $I_B = 2\text{ A}$   |          |            |            | V             |
| $h_{FE}$        | DC Current Gain                         | $I_C = 10\text{ A}$<br>$I_C = 20\text{ A}$   | 20<br>10 |            | 60         |               |
|                 |   | $V_{CE} = 2\text{ V}$<br>$V_{CE} = 4\text{ V}$   |          |            |            |               |
| $I_{S/b}$       | Second Breakdown Collector Current      | $V_{CE} = 30\text{ V}$<br>$V_{CE} = 48\text{ V}$                                       | 5<br>1   |            |            | A<br>A        |
|                 |   | $t = 1\text{ s}$<br>$t = 1\text{ s}$   |          |            |            |               |
| $f_T$           | Transistor Frequency                    | $I_C = 1\text{ A}$<br>$f = 10\text{ MHz}$  | 8        |            |            | MHz           |
| $t_{on}$        | Turn-on Time                            | $I_C = 20\text{ A}$<br>$V_{CC} = 30\text{ V}$  |          | 0.5        | 1.5        | $\mu\text{s}$ |
|                 |   | $I_{B1} = 2\text{ A}$  |          |            |            |               |
| $t_s$           | Storage Time                            | $I_C = 20\text{ A}$  |          | 0.6        | 1.2        | $\mu\text{s}$ |
| $t_f$           | Fall Time                               | $V_{CC} = 30\text{ V}$   |          | 0.15       | 0.3        | $\mu\text{s}$ |
|                 |   | $I_{B1} = -I_{B2} = 2\text{ A}$  |          |            |            |               |
|                 | Clamped $E_{S/b}$ Collector Current     | $V_{clamp} = 125\text{ V}$<br>$L = 500\text{ }\mu\text{H}$                             | 20       |            |            | A             |

\* Pulsed: Pulse duration = 300 $\mu\text{s}$ , duty cycle  $\leq 2\%$

**TO-3 MECHANICAL DATA**

| DIM. | mm    |      |       | inch  |      |       |
|------|-------|------|-------|-------|------|-------|
|      | MIN.  | TYP. | MAX.  | MIN.  | TYP. | MAX.  |
| A    | 11.00 |      | 13.10 | 0.433 |      | 0.516 |
| B    | 0.97  |      | 1.15  | 0.038 |      | 0.045 |
| C    | 1.50  |      | 1.65  | 0.059 |      | 0.065 |
| D    | 8.32  |      | 8.92  | 0.327 |      | 0.351 |
| E    | 19.00 |      | 20.00 | 0.748 |      | 0.787 |
| G    | 10.70 |      | 11.10 | 0.421 |      | 0.437 |
| N    | 16.50 |      | 17.20 | 0.649 |      | 0.677 |
| P    | 25.00 |      | 26.00 | 0.984 |      | 1.023 |
| R    | 4.00  |      | 4.09  | 0.157 |      | 0.161 |
| U    | 38.50 |      | 39.30 | 1.515 |      | 1.547 |
| V    | 30.00 |      | 30.30 | 1.187 |      | 1.193 |

