

BLV80-28

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:


The **BLV80-28** is Designed for 28 Volt Class C VHF Power Amplifier Applications up to 175 MHz.

FEATURES:

- $\eta_C = 65\%$ min. at 80 W/175 MHz
- $P_G = 6.5$ dB min. at 80 W/175 MHz
- **Omnigold™** Metalization System

MAXIMUM RATINGS

I_C	9.0 A
V_{CBO}	65 V
V_{CEO}	35 V
P_{DISS}	117 W @ $T_C = 25^\circ C$
T_J	$-65^\circ C$ to $+200^\circ C$
T_{STG}	$-65^\circ C$ to $+150^\circ C$
θ_{JC}	1.5 $^\circ C/W$

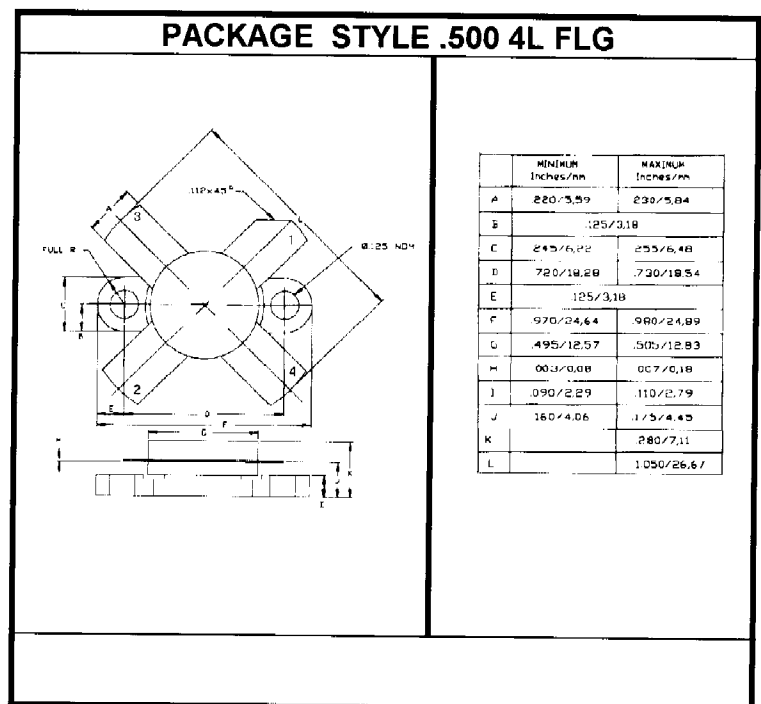

CHARACTERISTICS $T_C = 25^\circ C$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CBO}	$I_C = 20$ mA	65			V
BV_{CEO}	$I_C = 200$ mA	35			V
BV_{EBO}	$I_E = 10$ mA	4.0			V
I_{CBO}	$V_{CB} = 30$ V			1.5	mA
h_{FE}	$V_{CE} = 25$ V $I_C = 3.5$ A	15		100	---
C_{OB}	$V_{CB} = 30$ V $f = 1.0$ MHz			150	pF
P_G	$V_{CC} = 25$ V $P_{OUT} = 80$ W $f = 175$ MHz	6.5	7.0		dB
η_C		65			%



NJ Semi-Conductors reserves the right to change test conditions, parameters limits and package dimensions without notice information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.