

Silicon NPN Power Transistor

BU508A

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
 : $V_{CEO(SUS)} = 700V$ (Min)
- High Power Dissipation-
 : $P_D = 125W @ T_C = 25^\circ C$




APPLICATIONS

- Designed for use in large screen color deflection circuits.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CES}	Collector- Emitter Voltage ($V_{BE} = 0$)	1500	V
V_{CEO}	Collector-Emitter Voltage	700	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current- Continuous	8	A
I_{CM}	Collector Current-Peak	15	A
I_B	Base Current- Continuous	4	A
I_{BM}	Base Current-Peak	6	A
P_C	Collector Power Dissipation @ $T_C = 25^\circ C$	125	W
T_J	Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-65~150	$^\circ C$

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	1.0	$^\circ C/W$

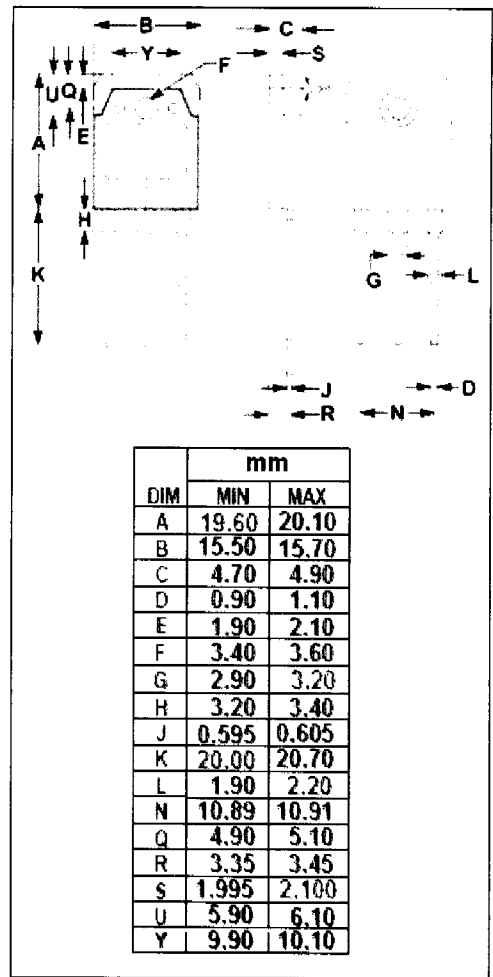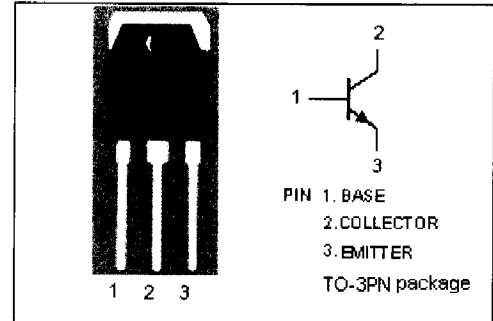

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

Silicon NPN Power Transistor

BU508A

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=30\text{mA}; I_B=0$	700			V
$V_{CE(sat)*}$	Collector-Emitter Saturation Voltage	$I_C=4.5\text{A}; I_B=2.0\text{A}$			1.0	V
$V_{BE(sat)*}$	Base-Emitter Saturation Voltage	$I_C=4.5\text{A}; I_B=2.0\text{A}$			1.3	V
I_{CES}	Collector Cutoff Current	$V_{CE}=1500\text{V}; V_{BE}=0$ $V_{CE}=1500\text{V}; V_{BE}=0; T_C=125^\circ\text{C}$			0.1 2.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=5.0\text{V}; I_C=0$			0.1	mA
h_{FE}	DC Current Gain	$I_C=0.1\text{A}; V_{CE}=5\text{V}$	6		30	
C_{OB}	Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f_{test}=0.1\text{MHz}$		125		pF
f_T	Current-Gain—Bandwidth Product	$I_C=0.1\text{A}; V_{CE}=5\text{V}; f_{test}=1.0\text{MHz}$		7		MHz

★: Pulsed: Pulse duration = 300 ms, duty cycle 1.5 %