

30 Amp Center Tapped Silicon Integrated Rectifiers


Controlled Avalanche Types with 250V,
450V, and 650V Minimum Avalanche Ratings

Non-Controlled Avalanche Types with
100V, 200V, 400V and 600V V_{RRM} Ratings

High Cycle Surge Current

Fast Recovery Types with 200 Nanosecond Maximum t_r

L.T.R.	INCHES	MILLIMETERS
A	.73-.77 Dia.	18.54-19.56 Dia.
B	.323-.342	8.20-8.69
C	.40 Min.	10.16
D	.038-.043 Dia.	.97-1.09
E	1.180-1.194	29.97-30.33
F	.665-.675	16.89-17.15
G	.426-.440	10.82-11.18
H	.525R Max.	13.34R
I	.151-.161 Dia.	3.84-4.09

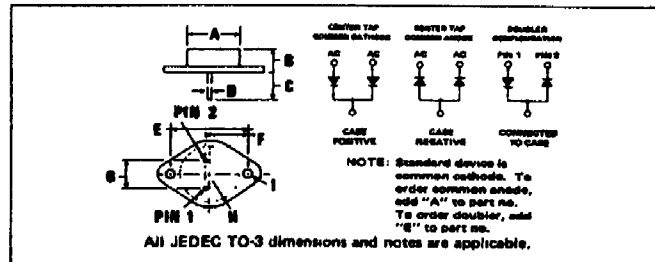

MAXIMUM RATINGS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

RATINGS	SYMBOL	CONTROLLED AVALANCHE			NON-CONTROLLED AVALANCHE				FAST RECOVERY TIME				UNITS
Series Number		R702	R704	R706	R711	R712	R714	R716	R711X	R712X	R714X	R716X	
DC Blocking Voltage	V_{RRM}	200	400	600	100	200	400	600	100	200	400	600	Volts
Working Peak Reverse Voltage	V_{RRM}												
Peak Repetitive Reverse Voltage	V_{RRM}												
RMS Reverse Voltage	V_{RRM}	140	280	420	70	140	280	420	70	140	280	420	Volts
Power Dissipation in V_{RRM} Region for 100 μ sec Square Wave (Per diode)	P_{RM}	1500			NA				NA				Watts
Continuous Power Dissipation in V_{RRM} Region at $T_C = 100^\circ\text{C}$ (Per diode)	P_R	4			NA				NA				Watts
Peak Surge Current, 1/2 Cycle at 60 Hz, (Non-Rep) and $T_C = 100^\circ\text{C}$ (Per diode) (Fig. 2)	I_{FSM}	300							150				Amps
Peak Surge Current, 1 sec at 60 Hz and $T_C = 100^\circ\text{C}$ (Per diode) (Fig. 2)	I_{FSM}	80							50				Amps
Avg. Forward Current at $T_C = 100^\circ\text{C}$ (Per diode)	I_O	15											Amps
Junction Operating and Storage Temperature Range	T_J, T_{STG}				- 65 to + 150								$^\circ\text{C}$
Fusing Data	I^2T	375							95				Amps ² Sec.

ELECTRICAL CHARACTERISTICS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

CHARACTERISTICS	SYMBOL	CONTROLLED AVALANCHE			NON-CONTROLLED AVALANCHE				FAST RECOVERY TIME				UNITS
Series Number		R702	R704	R706	R711	R712	R714	R716	R711X	R712X	R714X	R716X	
Minimum Avalanche Voltage	V_{AV}	250	450	650	NA				NA				Volts
Maximum Avalanche Voltage	V_{AV}	700	900	1100	NA				NA				Volts
Maximum Instantaneous Forward Voltage Drop (Per diode) at 15 Amps (Fig. 3)	V_{FM}	1.2							1.4				Volts
Maximum Reverse Current at Rated V_{RM} at $T_C = 100^\circ\text{C}$	I_{RM}	1							5				mA
Maximum Reverse Recovery Time at $I_F = 1A, I_R = 2A, I_{RM} = 0.5$ Amp	t_r	NA							200				nsec
Maximum Thermal Resistance, Junction to Case	R_{JC}	1.5											$^\circ\text{C/W}$

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.